


# 438S2R-1


S2/16WC ROOFING STAPLER-CT 38MM MAX














## S2 Fastener Summary

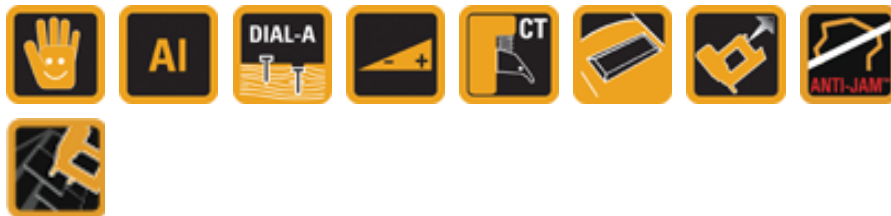

### Features & Benefits



### Accessories

-  Sequential Trip Trigger SEQ6
-  AI
-  DIAL-A
-  Triangle icon
-  CT
-  Magazine icon
-  ANTI-JAM™
-  Hand icon
-  Driver Assembly 103214
-  Walking Stick 438S2R-WS
-  Oil Lube SB32

<b>Model</b>	438S2R-1	<b>Operating Pressure</b>	PSI	60 - 100
<b>Weight</b>	2.13		BAR	4.2 - 7.0
<b>Dimensions L x W x H (mm)</b>	355 x 225 x 64	<b>Air Consumption Ltr.per shot @ 5.6 bar</b>		0.6
<b>Length (mm)</b>	19 (min) - 38 (max)	<b>Noise</b>	LPA 1sd	91.8
<b>Diameter (mm)</b>	1.4 (min) - 1.6 (max)		LWA 1sd	97.6
<b>Magazine Capacity</b>	100		LPA 1sd	84.6
		<b>Vibration m/s2</b>		< 2.5

STANLEY  
BOSTITCH®

### Stanley Bostitch UK

Gowerton Road  
Brackmills Industrial Estate  
Northampton NN4 7BW  
United Kingdom  
+44 (0)870 1 630 630  
+44 (0)870 1 670 670

