


# 438S4-1

S4/16NC STAPLER-CT 38MM MAX (438)





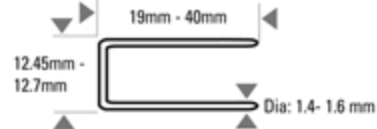


## S4 Fastener Summary



### Features & Benefits



### Accessories

- |  |  |
|--|--|
|  Sequential Trip Trigger SEQ6 |  Driver Assembly 104929 |
|  Contact Trip Trigger CNTK2   |  Walking Stick 438S4-WS |
|  Oil Lube SB32               |  |

<b>Model</b>	438S4-1	<b>Operating Pressure</b>	PSI	60 - 100
<b>Weight</b>	1.79		BAR	4.2 - 7.0
<b>Dimensions L x W x H (mm)</b>	355 x 225 x 64	<b>Air Consumption Ltr.per shot @ 5.6 bar</b>		0.6
<b>Length (mm)</b>	19 (min) - 40 (max)	<b>Noise</b>	LPA 1sd	83.7
<b>Diameter (mm)</b>	1.4 (min) - 1.6 (max)		LWA 1sd	93.0
<b>Magazine Capacity</b>	100		LPA 1sd	80.0
		<b>Vibration m/s2</b>		< 2.5

**BOSTITCH**

### Stanley Bostitch UK

Gowerton Road  
 Brackmills Industrial Estate  
 Northampton NN4 7BW  
 United Kingdom  
 +44 (0)870 1 630 630  
 +44 (0)870 1 670 670

