


BT200K-2


KIT BRAD NAILER-ST 50MM MAX







BT13 Fastener Summary

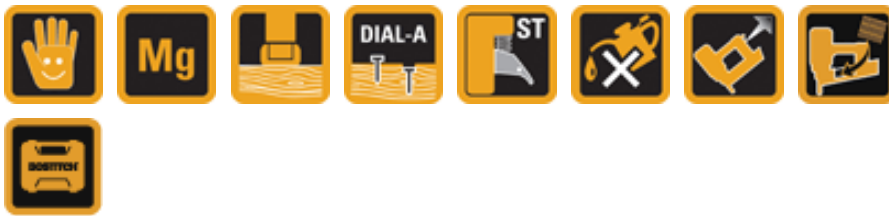

Features & Benefits



Accessories

-  Sequential Trip Trigger SEQ4
-  Contact Trip Trigger CNTK1
-  No Mar Tip 120056
-  Driver Piston Assembly 120075

Model	BT200K-2	Operating Pressure	PSI	70 - 120
Weight	0.95		BAR	4.8 - 8.3
Dimensions L x W x H (mm)	257 x 245 x 60	Air Consumption Ltr.per shot @ 5.6 bar		0.9
Head (mm)	2 (min) - 2 (max)	Noise	LPA 1sd	74.7
Length (mm)	15 (min) - 50 (max)		LWA 1sd	79.7
Diameter (mm)	1 (min) - 1.25 (max)		LPA 1sd	66.7
Magazine Capacity	110	Vibration m/s²		3.68

Stanley Bostitch UK

Gowerton Road
Brackmills Industrial Estate
Northampton NN4 7BW
United Kingdom
+44 (0)870 1 630 630
+44 (0)870 1 670 670

STANLEY
BOSTITCH®