


# CF15-1-E

CORRUGATED FASTENER TOOL-CT 15MM MAX





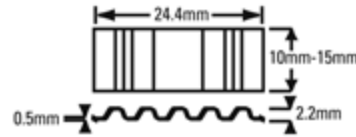

## CF Fastener Summary



### Features & Benefits



### Accessories

-  Sequential Trip Trigger SEQ4
-  Contact Trip Trigger CNTK1
-  Oil Lube SB32
-  Driver Piston Assembly G0215800

<b>Model</b>	CF15-1-E	<b>Operating Pressure</b>	PSI	65 - 120
<b>Weight</b>	2.65		BAR	4.8 - 8.3
<b>Dimensions L x W x H (mm)</b>	291 x 277 x 89	<b>Air Consumption Ltr.per shot @ 5.6 bar</b>		2.14
<b>Length (mm)</b>	10 (min) - 15 (max)	<b>Noise</b>	LPA 1sd	93.6
<b>Magazine Capacity</b>	100		LWA 1sd	99.6
			LPA 1sd	86.6
		<b>Vibration m/s2</b>		4.29

### Stanley Bostitch UK

Gowerton Road  
 Brackmills Industrial Estate  
 Northampton NN4 7BW  
 United Kingdom  
 +44 (0)870 1 630 630  
 +44 (0)870 1 670 670

STANLEY

BOSTITCH®