


F33PT-E


33° PAPER-TAPE STICK NAILER -ST +CASE








PT Fastener Summary

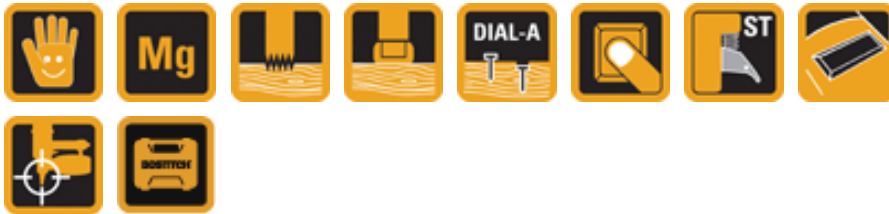

Features & Benefits



Accessories

-  Sequential Trip Trigger SEQ7
-  No Mar Tip 121070
-  Contact Trip Trigger CNTK4
-  Driver Piston Assembly 163922
-  Oil Lube SB32

Model	F33PT-E	Operating Pressure	PSI	70 - 120
Weight	3.6		BAR	4.8 - 8.3
Dimensions L x W x H (mm)	457 x 355 x 133	Air Consumption Ltr.per shot @ 5.6 bar		2.47
Head (mm)	7.2 (min) - 7.2 (max)	Noise	LPA 1sd	83.9
Length (mm)	50 (min) - 90 (max)		LWA 1sd	90.7
Diameter (mm)	2.5 (min) - 3.3 (max)		LPA 1sd	77.7
Magazine Capacity	75	Vibration m/s2		2.47

STANLEY
BOSTITCH®

Stanley Bostitch UK

Gowerton Road
 Brackmills Industrial Estate
 Northampton NN4 7BW
 United Kingdom
 +44 (0)870 1 630 630
 +44 (0)870 1 670 670

