


F33PTSM-E


33° PAPER-TAPE STICK NAILER -ST +CASE








PT Fastener Summary

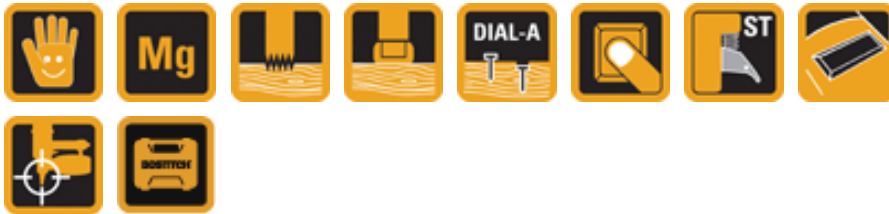

Features & Benefits



Accessories

- | | |
|---|--|
|  Sequential Trip Trigger
SEQ7 |  No Mar Tip
121070 |
|  Contact Trip Trigger
CNTK4 |  Driver Piston Assembly
163922 |
|  Oil Lube
SB32 | |

Model	F33PTSM-E	Operating Pressure	PSI	70 - 120
Weight	3.5		BAR	4.8 - 8.3
Dimensions L x W x H (mm)	360 x 355 x 133	Air Consumption Ltr.per shot @ 5.6 bar		2.47
Head (mm)	7.2 (min) - 7.2 (max)	Noise	LPA 1sd	90.8
Length (mm)	50 (min) - 90 (max)		LWA 1sd	99.7
Diameter (mm)	2.5 (min) - 3.3 (max)		LPA 1sd	86.7
Magazine Capacity	75	Vibration m/s2		3.026

STANLEY
BOSTITCH®

Stanley Bostitch UK

Gowerton Road
Brackmills Industrial Estate
Northampton NN4 7BW
United Kingdom
+44 (0)870 1 630 630
+44 (0)870 1 670 670

