


M10SIC-MG/30

BRAD NAILER-CT MINI TIP S 30MM MAX



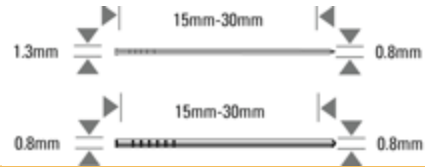

MINI S Fastener Summary



Features & Benefits



Accessories

-  Oil Lube SB32
-  Driver Piston Assembly D416202C01

Model	M10SIC-MG/30	Operating Pressure	PSI	60 - 100
Weight	1.02		BAR	4.0 - 7.0
Dimensions L x W x H (mm)	235 x 180 x 44	Air Consumption Ltr.per shot @ 5.6 bar		0.28
Head (mm)	0.8 (min) - 1.3 (max)	Noise	LPA 1sd	80.2
Length (mm)	15 (min) - 30 (max)		LWA 1sd	
Diameter (mm)	0.8 (min) - 0.8 (max)		LPA 1sd	
Magazine Capacity	180	Vibration m/s2		< 2.5

Stanley Bostitch UK

Gowerton Road
Brackmills Industrial Estate
Northampton NN4 7BW
United Kingdom
+44 (0)870 1 630 630
+44 (0)870 1 670 670

STANLEY

BOSTITCH®