

# N62FNK-2


15GA ANGL. FINISH NAILER-ST 64MM MAX







## FN15 Fastener Summary

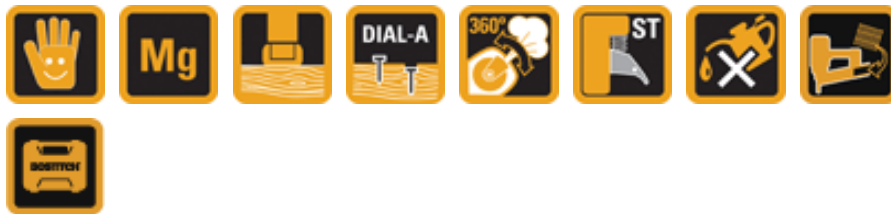

### Features & Benefits



### Accessories

-  Contact Trip Trigger CNTK1
-  Oil Lube SB32
-  No Mar Tip 107545
-  Driver Piston Assembly 107510

|                                  |                       |   |         |           |
|----------------------------------|-----------------------|---|---------|-----------|
| <b>Model</b>                     | N62FNK-2              | <b>Operating Pressure</b>                     | PSI     | 60 - 100  |
| <b>Weight</b>                    | 1.75                  |   | BAR     | 4.2 - 7.0 |
| <b>Dimensions L x W x H (mm)</b> | 373 x 295 x 83        | <b>Air Consumption Ltr.per shot @ 5.6 bar</b> |         | 1.65      |
| <b>Head (mm)</b>                 | 3.2 (min) - 3.2 (max) | <b>Noise</b>                                  | LPA 1sd | 93.3      |
| <b>Length (mm)</b>               | 25 (min) - 64 (max)   |   | LWA 1sd | 98.8      |
| <b>Diameter (mm)</b>             | 1.8 (min) - 1.8 (max) |   | LPA 1sd | 85.8      |
| <b>Magazine Capacity</b>         | 100                   | <b>Vibration m/s2</b>                         |         | 3.25      |

### Stanley Bostitch UK

Gowerton Road  
 Brackmills Industrial Estate  
 Northampton NN4 7BW  
 United Kingdom  
 +44 (0)870 1 630 630  
 +44 (0)870 1 670 670

STANLEY

BOSTITCH®