


N75C-2-E


SHEATHING COIL NAILER-ST 75MM F230-F250







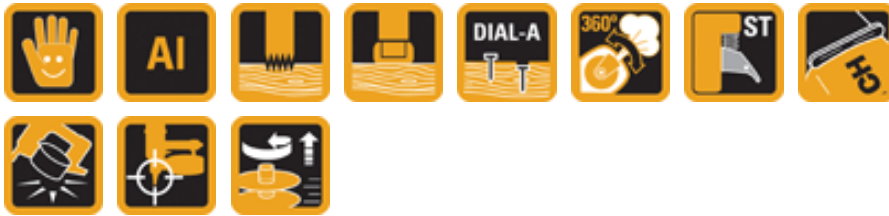

FAC Fastener Summary



Features & Benefits



Accessories

- | | |
|--|--|
|  Sequential Trip Trigger SEQ4 |  Oil Lube SB32 |
|  Contact Trip Trigger CNTK1 |  No Mar Tip P3030001732 |
|  Service Kit N66C-RK |  Driver Piston Assembly G0214900 |

Model	N75C-2-E	Operating Pressure	PSI	70 - 120
Weight	2.13		BAR	4.8 - 8.3
Dimensions L x W x H (mm)	264 x 356 x 124	Air Consumption Ltr.per shot @ 5.6 bar		1.53
Head (mm)	6.5 (min) - 7.2 (max)	Noise	LPA 1sd	90.6
Length (mm)	38 (min) - 75 (max)		LWA 1sd	99.3
Diameter (mm)	2.3 (min) - 3.1 (max)		LPA 1sd	86.3
Magazine Capacity	300	Vibration m/s2		3.05

Stanley Bostitch UK

Gowerton Road
 Brackmills Industrial Estate
 Northampton NN4 7BW
 United Kingdom
 +44 (0)870 1 630 630
 +44 (0)870 1 670 670



STANLEY
BOSTITCH