


# SL150-1

SL STAPLER-CT 32MM MAX








## SL Fastener Summary



### Features & Benefits




### Accessories

- |  |   |
|--|---|
|  Sequential Trip Trigger SEQ4 |  No Mar Tip 120056             |
|  Contact Trip Trigger CNTK1   |  Driver Piston Assembly 121276 |
|  Oil Lube SB32               |   |

<b>Model</b>	SL150-1	<b>Operating Pressure</b>	PSI	70 - 120
<b>Weight</b>	1.1		BAR	4.8 - 8.3
<b>Dimensions L x W x H (mm)</b>	257.1 x 244.5 x 59.7	<b>Air Consumption Ltr.per shot @ 5.6 bar</b>		0.9
<b>Length (mm)</b>	12 (min) - 38 (max)	<b>Noise</b>	LPA 1sd	76.1
<b>Diameter (mm)</b>	0.9 (min) - 1.3 (max)		LWA 1sd	80.6
<b>Magazine Capacity</b>	110		LPA 1sd	67.6
		<b>Vibration m/s2</b>		3.42

### Stanley Bostitch UK

Gowerton Road  
Brackmills Industrial Estate  
Northampton NN4 7BW  
United Kingdom  
+44 (0)870 1 630 630  
+44 (0)870 1 670 670

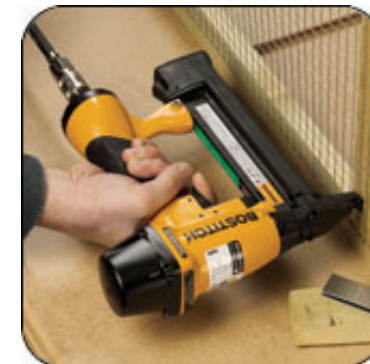

STANLEY  
BOSTITCH®